



We produce the best enclosure systems

Bricotec Folded Gate


Security enclosures for residential
easy to handle

TB

Calle Edison, nº1.
Pol. Ind. Can Estella.
08635 Sant Esteve Sesrovires.
Barcelona. España.
Telf: (00 34) 93 771 55 41
tecnomallas@tecnomallas.com
www.tecnomallas.com



Electro-welded panel
to easily
close small spaces.

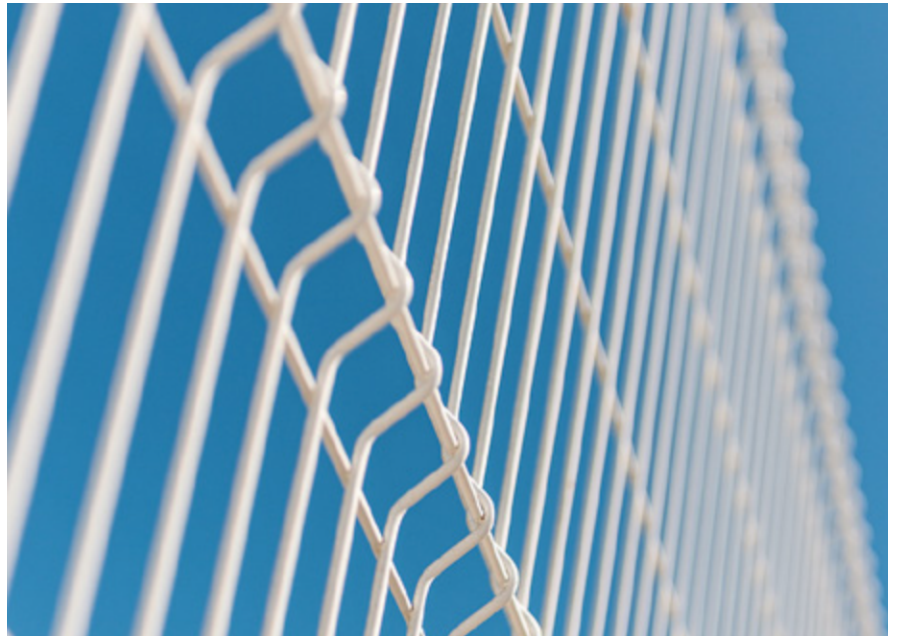

Tecnomallas Quality

The main goal of Industrias Tecnomallas, a company specialised in the production of electro-welded mesh, is to offer a product that meets the highest quality standards.

To achieve this goal, we rely on the most technologically advanced welding equipment, as well as a team of highly qualified workers. By constantly investing in the most modern and reliable welding equipment available, we have become one of the most competitive businesses in our industry.

- 1.- Our equipment, incorporating the most modern technology, allows us to guarantee an unexcelled welding finish.
- 2.- Our mesh is manufactured using grey, zinc-aluminium, galvanised or stainless-steel wire that meets the most demanding European standards in terms of tensile strength, weight, diameter, etc.
- 3.- The high flexibility of our welding lines allows us to optimise the production time for both small and large runs, reducing changeover times. We guarantee short delivery times and competitive prices.






Finishes

The panels can be manufactured in galvanised steel wire (in compliance with standard EN 10244-2), in grey wire (in compliance with standard ISO 16120-2), or in zinc-aluminium wire (in accordance with standard EN 10244-2). They can be plastic-coated with heat-strengthened polyester, epoxy, or PVC (see warranty table).

Standard colours



RAL 6005



RAL 9010



RAL 9005



RAL 7016

Special colours



OXIRON



RAL 1018



RAL 3027





RAL 7030


We can offer all the colours of the RAL Colour Chart.

Packing

All our folded fence are palletised for delivery. Edge protection with the manufactured pallets, ensures that the mesh panels undergo no deformation during transport or storage. Security packing allows for optimal storage up to eight height.

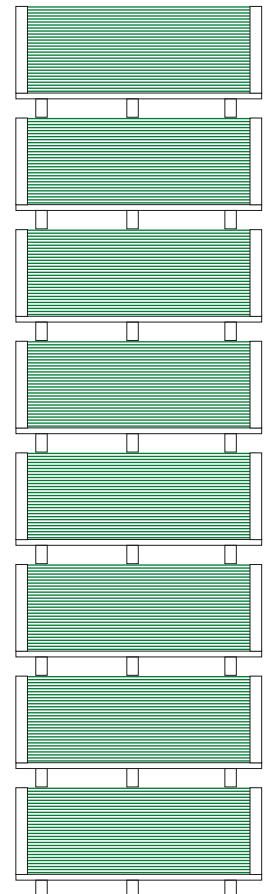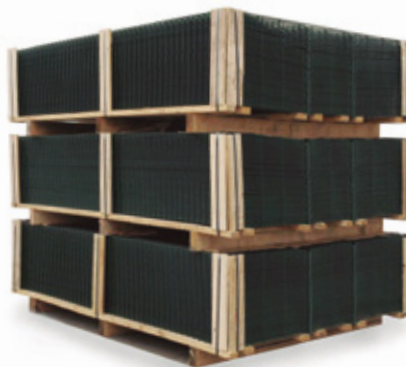


Dimensions

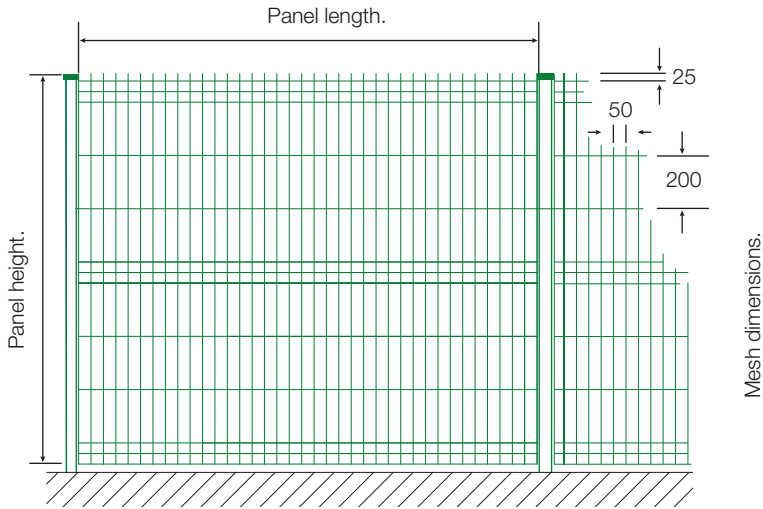

European standard fold


The fold meets all standard European measurements, making it compatible with all posts and fencing systems.

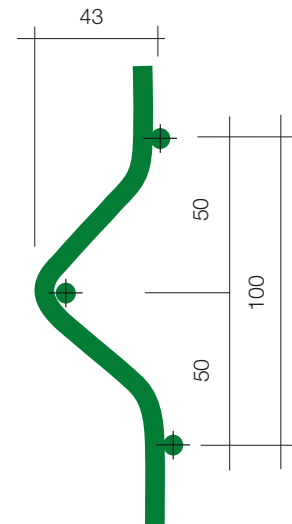

Mesh dimensions	Rod diameter	Reinforcement measurements	No. of reinforcements per panel	Panel length	Panel height
200 x 50	TB 4-4	50 x 50	2	2.000	625
			2		825
			2		1.025
			2		1.225
			3		1.525
			3		1.725
			4		2.025

Panel heights, number and location of reinforcements.


To achieve the desired rigidity, the number of "V" shaped folds in the panel varies according to its height. Rod extends 25 mm. upward from the top of the panel as a defensive strip. The rest of the panel has no points.

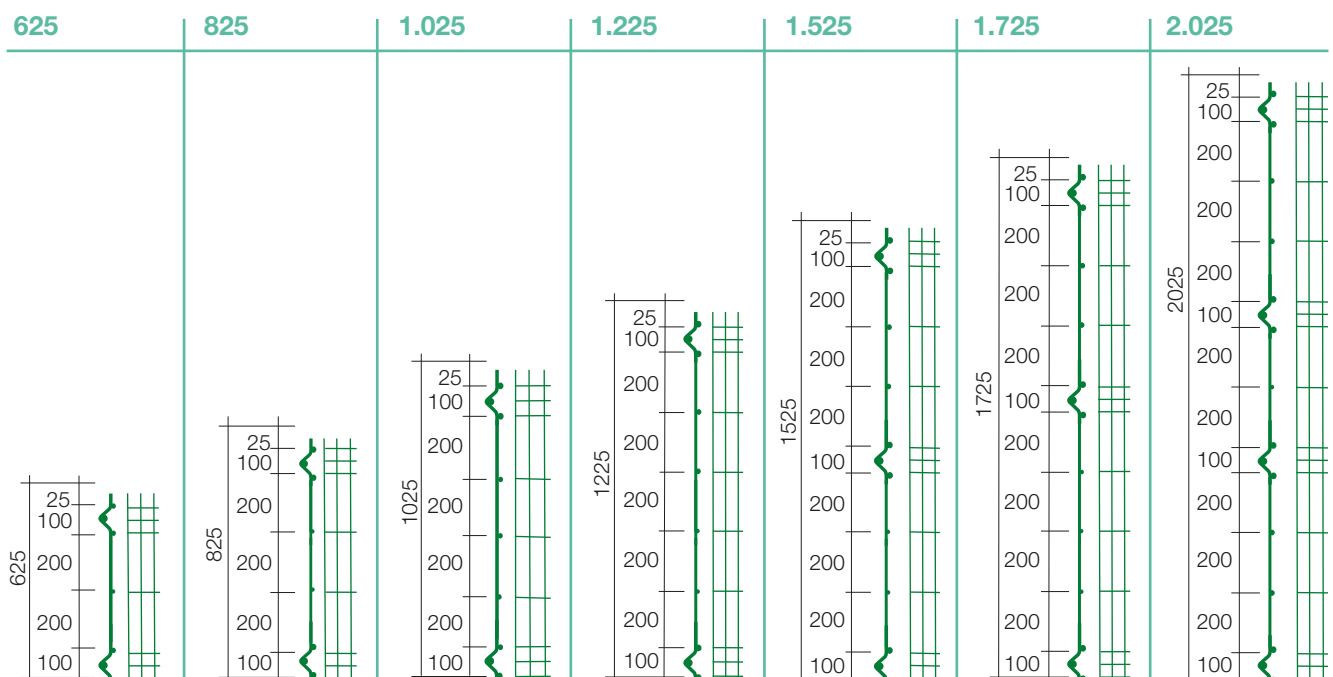

All dimensions in mm.



GUARANTEE TECNOMALLAS

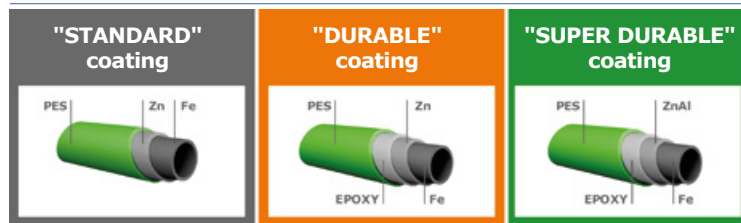

FOR POLYESTER FINISH PRODUCTS: FENCING PANELS AND POSTS

INSTALLED IN AREAS OF **LOW-MEDIUM AGGRESSIVE** ENVIRONMENT, ACCORDING TO STANDARD EN ISO 12944-2: "STANDARD" coating, a 5 to 10 year anti-corrosion guarantee, according to products, in normal environments.

CATEGORY	TYPES OF ENVIRONMENTS IN A TEMPERATE CLIMATE	GUARANTEE PERIOD ² STANDARD
C1 Very low aggressive	Only indoor exposure	10 years
C2 Low aggressive	Atmosphere with low level of pollution - Mostly rural areas	10 years
C3 Medium aggressive	Urban and industrial atmospheres, moderate sulfur dioxide pollution. Coastal areas with low salinity.	5-8 years

INSTALLED IN AREAS OF **HIGH AGGRESSIVE** ENVIRONMENT, ACCORDING TO STANDARD EN ISO 12944-2: "DURABLE" & "SUPER DURABLE" coating, a 5 to 10 year anti-corrosion guarantee, according to products, in aggressive environments.

CATEGORY	TYPES OF ENVIRONMENTS IN A TEMPERATE CLIMATE	DISTANCE BETWEEN PRODUCTS FORM THE SEA ¹	GUARANTEE PERIOD ² DURABLE 5	GUARANTEE PERIOD ² SUPER DURABLE 10
C4 High aggressive	Industrial areas with high sulfur dioxide pollution and coastal areas with moderate salinity	3 à 5 km	8 year dark colors*, 5 years light colors**	10 years all colors
C5 Very high aggressive	C5- I: Industriel areas with high humidity and aggressive atmosphere (i.e.chemical industry) in coastal and offshore areas	500 m and 3 km >to 500m, but offshore	5 years dark colors*	10 years dark colors*, 5 years light colors**
	C5- M : Coastal and offshore areas with high salinity	Seafront	-	5 years dark colors*

1 Guarantee for Europe only, other countries and locations to be agreed upon consultation for any specific project.

2 Expected lifetime based on saltspray and Kestemich

* Dark colors: in Standard RAL 6005 / RAL 7016 & RAL 9005**

** Light colors: in Standard RAL 9010 & RAL 7030

(Other RAL colors upon request)

Terms and Conditions of the Guarantee TECNOMALLAS: The detailed guarantee Tecnomallas is available at all times and upon request. The fencing systems consist of products and accessories Tecnomallas. The products are to be installed at a minimal distance of 500m from the seafont, when products are being installed at less than 500 m from the seafont, those are to meet the requirements described in the table above. Territories that are subject to a distribution agreement, warranty installation is to be carried out by the distributor.

TB Bricotec Folded Gate Security enclosures for residential use that are easy to handle



We produce the best enclosure systems

Calle Edison, nº1. Pol. Ind. Can Estella.
08635 Sant Esteve Sesrovires. Barcelona. España.
Tel: (00 34) 93 771 55 41
tecnomallas@tecnomallas.com
www.tecnomallas.com